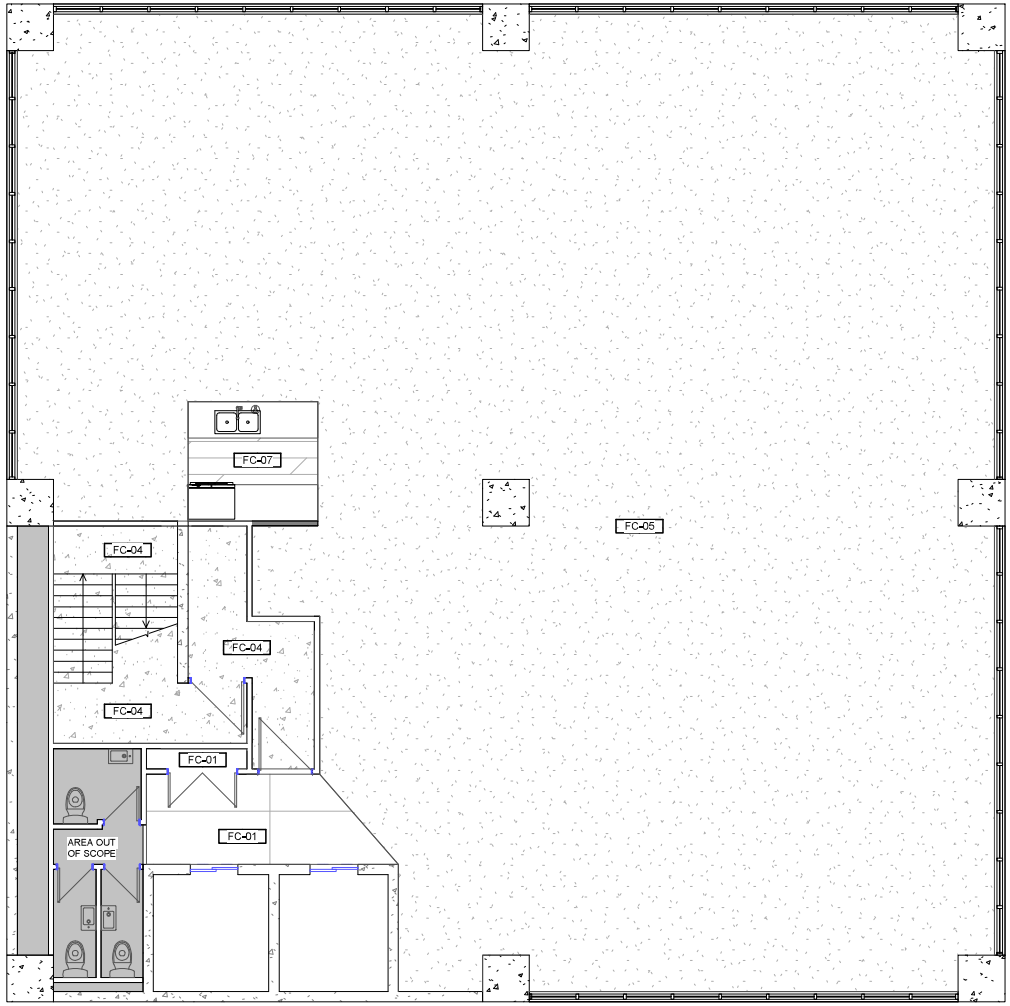


650 FLOOR FINISHES SCHEDULE	
ID	PRODUCT
FC-01	EUROPEAN CERAMICS. PORTRAITS COMBLANCHIEN NATURAL 2780 x 1195 x 6MM. GROUT: ARDEX FG8 '241 MISTY GREY'
FC-02	BELGOTEX. CULTURES. '44 WELLESLEY WAVE'. RF52953606-R RECOLOURED
FC-03	FREEDOM STRATEGIES. TREADMASTER MAXI STEP 2 (TMMS2). ALUMINIUM: SILVER. CARPET: CHARCOAL110
FC-04	BELGOTEX. BIOSPEC 'BASIC BLACK 15383'
FC-05	BELGOTEX. GRANITE 'MORNING FOG' 500X500 CARPET TILE. INSTALLATION: RANDOM
FC-06	BELGOTEX. SMOOTH 'AGGREGATE' 250X1000 CARPET PLANK. INSTALLATION: HERRINGBONE
FC-07	BELGOTEX. MATRIX ACOUSTIC 'RIVIERA OAK 1240'. INSTALLATION: HERRINGBONE

A FC-02 & FC-04 SPEC REVISED

B FC-05 & FC-06 SPEC REVISED

1 / 653 03 650 TYPICAL OFFICE PROPOSED FLOOR FINISHES PLAN (LVL 7)

1 : 100

NOTES:

-TILER TO ENSURE A CAVITY FREE INSTALLATION. THERE MUSTN'T BE ANY GAPS BETWEEN THE TILE AND THE SUBSTRATE.

-TILER NEEDS TO FULLY COVER THE TILE WITH ADHESIVE AND NOT SPOT FIX THE MATERIAL

-IT IS VITAL TO ENSURE THAT THE FLOOR IS LEVEL BEFORE INSTALLATION.

Y——6
1 CENTRE STREET , AUCKLAND CENTRAL
PO BOX 91112 AUCKLAND 1142 | WWW.YELLOW6.CO.NZ

ISSUE: FOR CONSTRUCTION | DRAWN: Author | CHKD: Checker

0 1 2 3 4m 1:100

NOTES

DO NOT SCALE FROM THIS DRAWING. FIRSTLY CHECK ALL DIMENSIONS, CLEARANCES & ACCESS SIZES ON SITE PRIOR TO CONSTRUCTION.

THE BUILDER IS RESPONSIBLE FOR THE SETTING OUT OF THE WORKS. THE CHECKING OF ALL DIMENSIONS AND LEVELS ON SITE, AND THE REPORTING OF ANY DISCREPANCIES TO THE ARCHITECT PRIOR TO COMMENCEMENT OF WORK. WORKS TO COMPLY WITH NZBC & NZ STANDARDS

COPYRIGHT OF THIS DRAWING AND DESIGN REMAINS THE PROPERTY OF YELLOW 6 DESIGN.

DATE:

PROJECT: LOBBY & OFFICE REFURB

SITE ADDRESS: 44 WELLESLEY ST WEST, AUCKLAND

CLIENT: CP GROUP

DWG TITLE: TYPICAL OFFICE PROPOSED FLOOR FINISHES PLAN (LVL 7)

REVISION	DATE	DESCRIPTION
A	08.10.19	UPDATES TO TENDER DRAWINGS
B	21.10.19	REVISED FLOOR FINISHES

PROJECT NO: 6703

DRAWING NO: 653

SCALE @ A3: 1 : 100

REVISION: B