


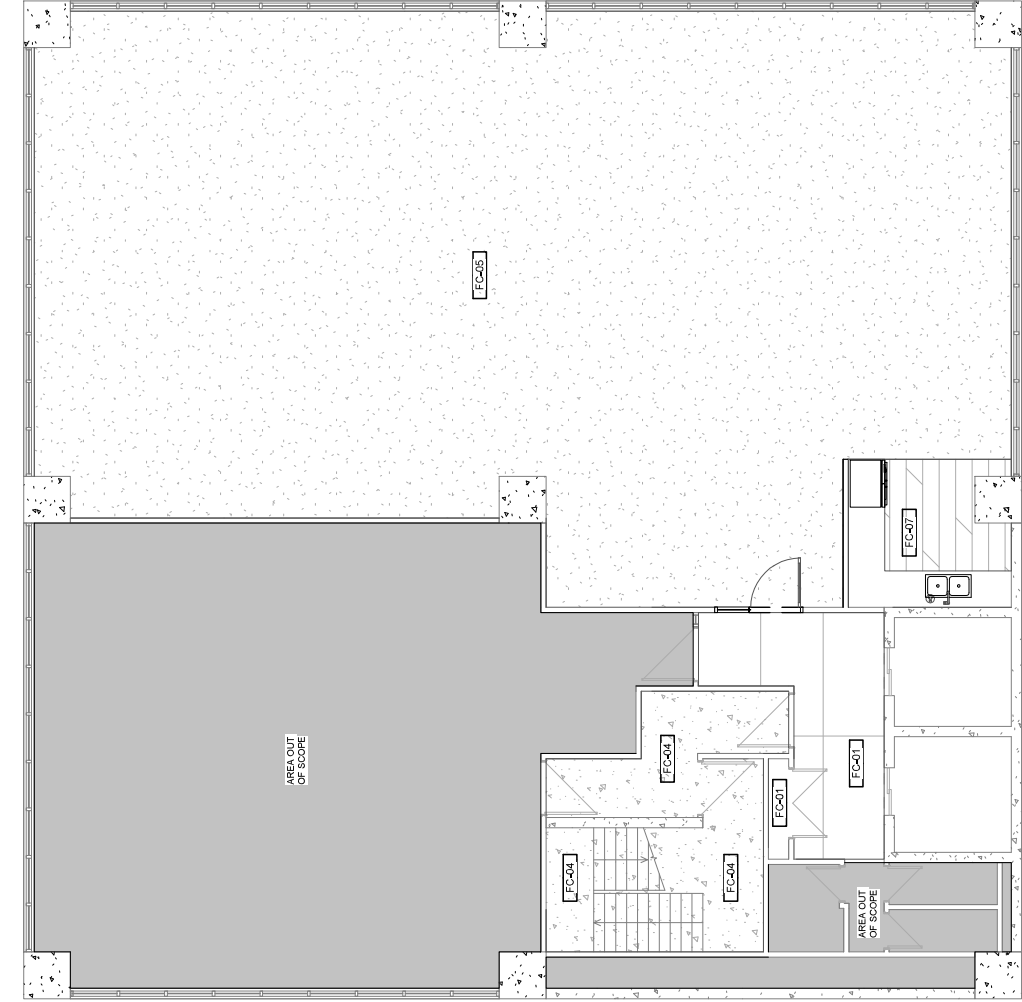

650 FLOOR FINISHES SCHEDULE	
ID	PRODUCT
FC-01	EUROPEAN CERAMICS, PORTRAITS COMBLANCHIEN NATURAL 2780 x 1195 x 9MM, GROUT: ARDEX FG8 '241 MISTY GREY'
FC-02	BELGOTEX, CULTURES, '44 WELLESLEY WAVE', RF5293606-R RECOLOURED
FC-03	FREEDOM STRATEGIES, TREADMASTER MAXI STEP 2 (TMS2), ALUMINIUM, SILVER, CARPET, CHARCOAL110
FC-04	BELGOTEX, BIOSPEC 'BASIC BLACK 15383'
FC-05	BELGOTEX, GRANITE 'MORNING FOG' 500X500 CARPET TILE, INSTALLATION: RANDOM
FC-06	BELGOTEX, SMOOTH 'X-GREGATE' 250X1000 CARPET PLANK, INSTALLATION: HERRINGBONE
FC-07	BELGOTEX, MATRIX ACOUSTIC 'RIVIERA OAK 1240', INSTALLATION: HERRINGBONE

FC-05 & FC-06 SPEC
A
REVISED

NOTES:

- TILER TO ENSURE A CAVITY FREE INSTALLATION, THERE MUSTN'T BE ANY GAPS BETWEEN THE TILE AND THE SUBSTRATE.
- TILER NEEDS TO FULLY COVER THE TILE WITH ADHESIVE AND NOT SPOT FIX THE MATERIAL
- IT IS VITAL TO ENSURE THAT THE FLOOR IS LEVEL BEFORE INSTALLATION.

05 650 TYPICAL OFFICE PROPOSED FLOOR FINISHES PLAN (LVL 8.9)

1 : 100



Y—6		ISSUE		DRAWN/Author		CHKD/Checker		FOR CONSTRUCTION		01234m		1:100		1 CENTRE STREET, AUCKLAND CENTRAL PO BOX 51112 AUCKLAND 1142 WWW.YELLOW6.CO.NZ	